

P18153.P01

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P18153

Total Pages

 Inventor(s) or Application Identifier
Toshihisa SAWADA

 Title: IMAGE TRANSMITTING APPARATUS AND
RECEIVING APPARATUS

ADDRESS TO:

 Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

- ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 29]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 13]
4. ☒ Oath or Declaration [Total Pages 3]
a. ☐ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2)
and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.
5. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
Status still proper and desired
15. ☐ The prior application is assigned of record to _____
16. ☒ Foreign priority claimed
a. ☒ Claim of Priority
b. ☒ Certified Copy of Priority Document(s)
17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a _____ continuation-in-part, _____ division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

 GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

Signature

Bruce H. Bernstein Reg No. 29,027

Typed or Printed Name

[illegible]

IMAGE TRANSMITTING APPARATUS AND IMAGE RECEIVING
APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an image
transmitting apparatus for transmitting image data
similar to a facsimile apparatus by use of an e-mail system,
and relates to an image receiving apparatus for receiving
the transmitted image data. The present invention
10 relates particularly to the Internet facsimile apparatus
wherein an image file is attached to an e-mail and
transmission and reception are carried out on the
Internet.

Description of the Related Art

15 The Internet facsimile apparatus (hereinafter
referred to as IFAX) is conventionally known as a new
facsimile image communication apparatus. IFAX converts
image data of an original to a file of a TIFF format,
attaches the image file to a mail main body as a form of
20 an attached file, and transmits such an image file to an
e-mail address for a recipient by use of the e-mail.

By the way, for directly transmitting a large amount
of data such as a color image to a recipient's apparatus
by the above IFAX, a large amount of memories is required
25 in the recipient's apparatus. For this reason, in many
cases, there are difficulties in transmitting the color
image by use of the e-mail in actuality.

In order to deal with such difficulties, a new image

communication system has been proposed. In this system, the e-mail having image data attached is not directly transmitted to the mail address of the recipient's apparatus. Instead of such a direct transmission, image data is registered to a WWW server placed on the network and a URL (Uniform Resource Locator) for accessing to the WWW server is transmitted to the recipient's apparatus. The above system can prevent an unexpected large amount of data from being directly sent to a mail box of a recipient's terminal.

However, in view of the usability, the registration of transmission data to the WWW server from IFAX and the transmission of URL to the recipient's terminal are not still good enough in the case of transmitting a large amount of data such as a color image.

In other words, even if image data is placed at the WWW server, the large amount of data must be fetched at one time when the recipient's apparatus fetches data. For this reason, the large amount of memories is required in the recipient's apparatus. Also, in the case of color printing the color image received from the WWW server, the entire received original is printed. For this reason, a lot of printing time is required, and its cost is increased. Moreover, even when an operator wishes to transmit and print an image with a higher quality than an image quality determined in a standard image data format, the image is always limited to a determined quality. Also, in a case where the operator wishes to

change the WWW server where transmitting data is registered in accordance with the transmitting destination, such a case cannot be carried out.

SUMMARY OF THE INVENTION

5 An object of the present invention is to provide an image transmitting apparatus having a good usability wherein a recipient can fetch image data by unit of page and instruct printing selectively and no large amount of memory is required to the recipient.

10 The above object can be achieved by an image transmitting apparatus, which generates a menu screen in a markup language, registers image data filed by unit of page to a server together with a generated markup file, and sends notification of a server address to a recipient
15 to which image data should be transmitted.

 According to the present invention, when the recipient accesses to the server by use of the server address, downloads the menu screen, and clicks a file name described on the menu screen, reception by unit of one
20 page is possible.

 The above object can be achieved by an image transmitting apparatus comprising:

 filing means for filing image data by unit of page:

 registering means for registering a filed image file

25 to a server apparatus: and

 informing means for transmitting an e-mail including a server address of the server apparatus to a recipient to which the image data should be transmitted.

The above object can be achieved by a server apparatus, which registers image files from the above image transmitting apparatus and selects a requested image file when an image receiving apparatus where an
5 image is sent accesses thereto, and transfers the selected image file thereto.

The above object can be achieved by an image receiving apparatus comprising:

address extracting means for extracting a server
10 address by use of an e-mail received from an image transmitting apparatus; and

image obtaining means for obtaining an image file by unit of page by accessing to a server apparatus using the extracted server address.

15 The above object can be achieved by an image transmitting method comprising the steps of:

filing image data by unit of page:

generating a menu screen in which a file name of the image data is registered in a form of a structured
20 document;

registering the filed imaged data and the menu screen to a server apparatus; and

transmitting an e-mail including a server address of the server apparatus to a recipient to which image data
25 should be transmitted.

The above object can be achieved by an image receiving method comprising the steps of:

receiving an e-mail including a server address to

which image data to itself is registered;

extracting the server address from the received e-mail;

accessing to a server apparatus using the extracted
5 server address so as to obtain a menu screen; and

obtaining image data by unit of page using the menu screen.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the
10 invention will appear more fully hereinafter from a consideration of the following description taken in connection with the accompanying drawing wherein one example is illustrated by way of example, in which;

15 FIG. 1 is a functional block diagram of an Internet facsimile apparatus according to an embodiment of the present invention;

FIG. 2 is a network structural view having the present apparatus;

20 FIG. 3 is a structural view showing an e-mail address/URL corresponding table according to the above embodiment;

FIG. 4 is a structural view showing a corresponding table showing an e-mail address/URL, which are
25 registered in a single button dialing, according to the above embodiment;

FIGS. 5A and 5B are structural views showing a transmission data attribute table according to the above

embodiment;

FIG. 6 is a structural view showing a reception capability table according to the above embodiment;

FIGS. 7 to 9 are flowcharts showing transmitting operations according to the above embodiment;

FIG. 10 is a view showing an original character string for a menu HTML according to the above embodiment;

FIG. 11 is a view showing a menu HTML generated according to the above embodiment;

FIG. 12 is a mail header including URL generated according to the above embodiment;

FIG. 13 is a flowchart showing the first half of the receiving operation according to the above embodiment;

FIG. 14 is a flowchart showing the second half of the receiving operation according to the above embodiment;

FIG. 15 is a view showing a print instruction buffer according to the above embodiment;

FIG. 16 is a conceptual view showing a touch panel and display section according to the above embodiment;

FIG. 17 is a functional block diagram showing a recipient's terminal according to the above embodiment; and

FIG. 18 is a block diagram showing the function of the e-mail transmission of an Internet facsimile apparatus according to the other embodiment of the present invention.

DETAILED DESCRIPTION OF THE
PREFERRED EMBODIMENTS

An embodiment of the present invention will now be described with reference to the accompanying drawings.

- 5 FIG. 1 is a hardware block diagram of a facsimile typed image communication apparatus (hereinafter referred to as "present apparatus") according to an embodiment of the present invention. In the present apparatus, CPU 1 controls the entirety of the apparatus.
- 10 A ROM 2, a RAM 3, an auxiliary storing device 4, a touch panel and display section 5, a scanner 6, a LAN control section 7, and a printer 8 are connected to CPU 1 via an internal bus. ROM 2 stores a program, which is executed by CPU1, and RAM 3 is used as a program generating
- 15 area or a storing area for temporarily storing mail data and image data. The auxiliary storing device 4 comprises a hard disk, and is used to store image data. The structure in which the auxiliary storing device 4 is reduced can be used by the simplification of transmitting
- 20 and receiving processing. The touch panel and display section 5 functions as both a display section for displaying image data and an operation instruction guide and a touch panel for displaying an alphabet, a numeric figure, a mark, a one touch dial to input an operation
- 25 instruction. The use of the touch panel and display section 5 allows displaying image data, instructing printing, and inputting an address. The scanner 6 scans an original and converts it to image data. In a case of

a color original, the scanner 6 converts the color original to color image. The LAN control section 7 is a LAN interface that receives and transmits data through a network.

5 FIG. 2 is a network structural view having the present apparatus. A present apparatus 20 is connected to Ethernet. The present apparatus 20 is connected to a network 21 via Ethernet. The network 21 is the Internet or Intranet. The present apparatus 20 registers image
10 data to a WWW server 22 provided in the network 21 on one hand and transmits URL for WWW server 22 to a recipient's terminal 23 positioned forward of the network 21 on the other hand.

 The present apparatus 20 comprises a divisional
15 registration function and a multiform registration function. The divisional registration function files image data of a plurality of pages by unit of page so as to be registered to WWW server 22. The multiform registration function registers transmitting image data
20 to WWW server 22 in a plurality of data formats having a standard data format and a non-standard data format. The divisional registration function and the multiform registration function can be realized by executing the program stored in ROM 2 with the CPU 1.

25 Note that the embodiment of the present invention is explained on the assumption that data of an A4 size, 300 dpi, "YcdC" color space", and JFIF (JPEG File Interchange Format) is set in the standard data format,

and other data is set in the non-standard data format.

The present apparatus 20 also comprises a server selection function for automatically changing a WWW server in accordance with a transmission destination.

- 5 The selection of the server according to the transmission destination is carried out using the corresponding table in which an e-mail address and a URL of a WWW server are made to correspond to each other.

FIG. 3 shows the structural example showing an
10 e-mail address/URL corresponding table registered in ROM 2 in association with the server selection function. In the corresponding table, a plurality of e-mail addresses for transmission destinations can be registered, URL addresses of WWW servers are registered in accordance
15 with the respective e-mail data, and image data to be transmitted to the respective e-mail addresses are registered therein. Regarding the e-mail address, the complete address may be described or a part of the address (e.g., only domain) may be registered using a wild card
20 (*). Also, one WWW server is registered an e-mail address (vacant address) using only a wild card. The reason is to select a WWW server having a default value when an e-mail address (entirety or part), which is not registered in the corresponding table, is input.

- 25 FIG. 4 is a corresponding table in which a WWW server can be selected when an e-mail address is input using a single button dialing. As shown in this figure, the single button dialing, the e-mail address and the URL

of the WWW server to be used are made to correspond to each other.

FIGS. 5A and 5B show the structure of transmission data attribute tables registered in ROM 2 in association with the multiform registration function of the present apparatus. FIG. 5A is a table showing a case in which only standard data is sent, and FIG. 5B is a table showing a case in which non-standard data is sent together with standard data.

In a file attribute box of FIG. 5A, only ".jpg", which is standard data is registered. In a file attribute box of FIG. 5B, ".fif", ".bmp", are registered in addition to ".jpg", which is standard data. A file attribute = ".tif" means a TIFF file, and a file attribute = ".bmp" means a bit map file, and these files are dealt as non-standard.

Also, in the transmission data attribute table, a multi-page sign is added to each file attribute. A multi-page sign = 1 is added to the file attribute (format) in which a plurality of pages are included in one file, and a multi-page sign = 0 is added to the other file attributes (formats).

The present apparatus is used as a receiving apparatus when receiving image data from the WWW server. The recipient's terminal 23 of FIG. 2 can be formed to have the same structure as that of the present apparatus 20. In this case, a file selection obtaining function for selecting and obtaining a file suitable for an own

processing capability is provided to the recipient's terminal 23.

FIG. 6 is a structural view of a reception capability table for providing the file selection obtaining function to the recipient's terminal 23. In the reception capability table, the own processing capability relating to the file attribute is registered. The file attributes are arranged in order of descending priorities when it is possible to handle a plurality of file attributes.

Next, an operation of the above-structured present apparatus will be explained. FIGS. 7 to 9 show flowcharts for the transmitting operation of the present apparatus 20. An e-mail address of the recipient terminal 23 is input from the touch panel and display section 5 (ST701). A mail address matching the input e-mail address is searched from the e-mail address/URL corresponding table shown in FIG. 3. As a result of the search, if a match exists, a URL of a WWW server corresponding to the e-mail address is determined, and the determined URL is stored in a predetermined area of RAM 3 (ST702).

Next, the scanner is operated in response to the operation input from the touch panel and display section 5. The scanner 6 scans an original and fetches image data. When a plurality of originals is set, the scanner 6 executes an original scanning operation and fetches image data for a plurality of pages (ST703). Image data fetched from the scanner 6 is filed by unit of page and a file name including a serial number such as "fax01", "fax02"

is added for each page, and stored in the auxiliary storing device 4, sequentially (ST703). A page count is carried out at the same time when image data is stored to the auxiliary storing device 4 by unit of page.

5 Next, a home directory is generated in the WWW server (URL) selected in ST702 (ST704). The WWW server selected in ST702 is hereinafter the WWW server 22. More specifically, a subdirectory, having a name including an hour, a minute, a second in the server to be unique in
10 the server, is generated using a FTP command under the directory preset for an FTP (File Transfer Protocol) registration in the WWW server 22. In this specification, this subdirectory is referred to as a home directory. The home directory is used to register the file (file by unit
15 of page) stored in ST703.

Next, an original character string for an HTML (Hyper Text Markup Language) to be used as an original menu is prepared on RAM 3 (ST705). FIG. 10 shows an original character string for a menu HTML.

20 If an image data file stored in ST703 exists in the auxiliary storing device 4 (ST706), the image data file for an original stored in the auxiliary storing device 4 is read one page by one from "fax01". Then, the read image data file is converted to JFIT (ST707), and
25 registered in the home directory of the WWW server 22 by the same file name using FTP (ST708). The line including the same file name as that registered in the home directory is inserted into the character string (portion of <BODY>)

of the menu HTML prepared on RAM 3 (ST709). This HTML is regarded as a new HTML.

When the line of HTML having the file name registered in the home directory is inserted into the menu HTML, it
5 is checked whether or not an instruction for transmitting non-standard data is set in the transmission data attribute table (ST710). If the instruction for transmitting non-standard data is not set therein, the operation goes back to step ST706 to determine whether
10 or not the image data file is left. The processing from ST707 to 709 is repeated until processing of image data for all pages, which are stored in the auxiliary storing device 4, is ended.

While, if the instruction for transmitting non-
15 standard data is set in ST710, determination as to whether or not data is non-standard data for one file multi-page is further carried out (ST711). This determination is carried out based on the multi-page sign set in the transmission data attribute table. If the multi-page
20 sign = 0 is set, image data is converted to a non-standard data format registered in the transmission data attribute table (ST712).

Then, image data converted to the non-standard format is registered in the home directory of the WWW
25 server 22 using FTP (ST713). The line including the file name of image data registered in the home directory is inserted into the menu HTML (ST714).

Note that a plurality of pages must be converted to

one file when the multi-page sign registered in the transmission data attribute table = 0 is set. The image data file stored in the auxiliary storing device 4 corresponds to one page. The plurality of pages is read
5 one page by one and edited in the non-standard format, with the result that the plurality of pages is converted to one file and temporarily stored in the auxiliary storing device 4 (ST715).

An example of a description of thus completed HTML
10 is shown in FIG. 11. FIG. 11 is an example originals for three pages are described in the standard data format and two non-standard data formats (TIFF and bit map).

While, if it is determined that all files stored in the auxiliary storing device 4 have been stored in the
15 home directory in ST706, it is determined whether or not non-standard data for one file multi-page is generated (ST716). If non-standard data for one file multi-page is generated and stored in the auxiliary storing device 4, the stored non-standard data is registered in the home
20 directory of the WWW server 22 using FTP (ST717). The line including the file name of non-standard data registered in the home directory is inserted into the menu HTML on RAM 3 (ST718).

Next, a file name, that is, index.html is added to
25 the home directory of the WWW server 22 and the menu HTML thus generated on RAM 3 is registered using FTP (ST719).

Then, a URL in which the name of the home directory is added at the back of the URL (URL of WWW server 22)

stored in ST702 is generated (ST720). The generated URL is described in an External-Body Subtype field of an MIME header of the e-mail, and is transmitted to the recipient's terminal 23 by the e-mail.

5 FIG. 12 shows an example of the header of the e-mail including the above-mentioned URL. The URL may be described in a mail main body or a subject field.

10 In the example of the simple present apparatus that transmits only the image file in the standard data format, every time when an image file for one page is generated, the corresponding image file may be sequentially registered in the server. Namely, a series of processing, which includes the reading the file for one page, the JFIF conversion, and the registration to the WWW server, is
15 repeated through all pages. This eliminates the need for reading all pages at one time, and reduces the capacity of the auxiliary storing device 4.

20 Next, a receiving operation in which the recipient's terminal 23 fetches the registered image file from the WWW server 22 will be explained with reference to the flowcharts of FIGS. 13 and 14. As mentioned above, the present apparatus 20 transmits the URL of the WWW server 22 to the mail address of the recipient's terminal 23 by use of the e-mail.

25 When the recipient's terminal 23 receives the e-mail including the URL of the WWW server 22 (ST1201), the recipient's terminal 23 fetches the URL from the mail header (MIME header) of the e-mail (ST1202). Then, the

recipient's terminal 23 accesses to the WWW server 22, which the URL shows, using HTTP, and fetches a menu HTML from the WWW server 22 (ST1203).

Next, the recipient's terminal 23 selects a file
5 attribute suitable for the own capability from the file attributes registered in the menu HTML (ST1204). For this reason, the recipient's terminal 23 fetches the file attribute in order of descending priorities, and compares the fetched file attribute with the file attribute in the
10 line where the file name of the menu HTML is described. If there is a file matching a file attribute having the highest priority in the menu HTML, the file name of the file attribute is decided as a file to be received. While, if there is no file matching the file attribute having
15 the highest priority in the menu HTML, the recipient's terminal 23 fetches a file attribute having the next highest priority in the reception capability table and carries out the similar checking. The recipient's terminal 23 fetches the file attribute from the reception
20 capability table as lowering the priority sequentially until a matching file attribute is found, and executes the similar checking.

If the attribute of the file name thus decided is a file such as ".TIF" that includes a plurality of pages
25 in one file, the recipient's terminal 23 reads the entirety of the file from the WWW server 22, converts the file in a format in which the file can be read by unit of page, and writes the converted file into the own

auxiliary storing device(ST1206). At this time, the recipient's terminal 23 counts the number of all pages of the file, and stores the number of counted pages (ST1208). Also, if the file is not one that includes a plurality of pages in one file, the recipient's terminal 23 counts the number of all pages from the description of the menu HTML, and stores the number of counted pages (ST1207).

Next, the recipient's terminal 23 determines whether or not an automatic printing mode is designated (ST1209). If the automatic printing mode is designated, the page numbers of all pages are written into a print instruction buffer (ST1210). An example of the print instruction buffer is shown in FIG. 15. The page numbers of all pages are written at one time.

First of all, a pointer for a page number of the print instruction buffer is placed at the head portion (ST1211). It is confirmed that the pointer does not exceed the print instruction buffer (ST1212). Image data of the page shown by the pointer is read from the WWW server 22 or the own auxiliary storing device (ST1213). The read page is printed (ST1214). The pointer of the print instruction buffer is advanced by one (ST1215). Similarly, print processing for image data of a next page is carried out. This print processing is repeated until the pointer exceeds the print instruction buffer.

If it is determined that the automatic printing mode is not designated in ST1209, a selection of a page number,

which can enter the print instruction buffer, is instructed. It is assumed that the recipient's terminal 23 comprises the touch panel and display section as shown in FIG. 16. The recipient's terminal 23 reads image data one page by one in order of pages from the WWW server 22 or the own auxiliary storing device in accordance with the operation using the touch panel and display section. Then, image data is displayed on the panel of the touch panel and display section (ST1217). An operator selects the presence or absence of print by unit of page. The recipient's terminal 23 waits for a print instruction in a state that image data for one page is displayed on the panel (ST1218). If the print instruction is input by the operator, the page number is written in the print instruction buffer (ST1219). Then, a next page button of the touch panel and display section is depressed, and the recipient's terminal 23 advances the page by one (ST1220). While, if the print instruction is not input, the recipient's terminal 23 advances the page by one as it is (ST1220). In the case of the touch panel and display section, if the operator depresses the range where the image is displayed with a finger, the recipient's terminal 23 determines it as a print instruction, and displays an outer frame.

25 An example of the structure of the recipient's terminal is shown in FIG. 17. According to this embodiment, a terminal, which receives image data from the WWW server, is referred to as a recipient's apparatus,

and may have the same structure as that of the present apparatus 20. The recipient's terminal shown in this drawing has the same functions as those of the present apparatus 20. Moreover, the touch panel and display section is a remote-control type, which is separated from the main body of the apparatus. The main body side has a remote-control communication section 9, and a remote-control side has a touch panel and display section 10 and a remote-control communication section 11.

According to the above-mentioned embodiment, image data filed by unit of page is registered to the WWW server 22, and the URL for obtaining access to the WWW server 22 is transmitted to the mail address of the recipient's terminal 23. As a result, at the time when the receiver side processes image data on the WWW server, the receiver side can receive image by unit of page, and an auxiliary storing device for the entire pages need not be provided.

Further, according to the embodiment of the present invention, image data to be transmitted is registered to the WWW server 22 in the plurality of data formats including the standard data format and the non-standard data format. Then, the URL for obtaining access to the WWW server 22 is transmitted to the mail address of the recipient's terminal 23. As a result, it is possible to transmit image data by one reading processing such that full use can be made of recipient's capability in either case that the recipient's terminal is the simple apparatus which supports only the standard data format or supports

non-standard data format of high quality.

Also, according to the embodiment of the present invention, the corresponding table in which the recipient's e-mail address and the server address to which
5 the image registration should be provided are made to correspond to each other is prepared so that the server can be automatically selected. In accordance with the recipient, the WWW server can be selected without making the operation content complicated. For example, a WWW
10 server for many users like a bulletin board and a WWW server for limited members can be used in accordance with the recipient.

The present invention is not limited to the above embodiment. For example, in the aforementioned
15 embodiment, the image was transferred and registered to the WWW server of the URL registered in the corresponding table shown in FIG. 3 based on the e-mail address. However, regarding a specific e-mail, the image is attached to the e-mail and transmitted to the recipient's
20 terminal without registering the image to the WWW server. Also, the transmission to the recipient's terminal by use of the e-mail may be set to a default value.

Namely, the present apparatus may use both the image transmission via the WWW server and the image transmission
25 by use of the e-mail. FIG. 18 is a block diagram showing the function of the e-mail transmission of an Internet facsimile apparatus according to the other embodiment of the present invention. The present apparatus has the

same structure as that of IFAX according to the
aforementioned embodiment shown in FIG. 1. In the
present apparatus, at the transmission time, first of all,
a compression and decompression 101 compresses a raw image
5 scanned by a scanner 6 to compressed data at a transmission
time. Next, a TIFF converting section 102 converts
compressed data to a TIFF file. A plurality of compressed
data is stored in the TIFF file such that one compressed
data is stored with respect to one page of an original.
10 A destination's address of an e-mail to be transmitted
is sent to an e-mail generating section 103 in accordance
with an input from the touch panel and display section
5. Then, the e-mail generating section 103 generates an
e-mail including the TIFF file as an attached file. In
15 other words, the TIFF file is text coded, and the
text-coded TIFF file is attached to a mail data section,
which is defined by, for example, MIME (Multipurpose
Internet Mail Extensions). Thereafter, a mail
transmitting section 104 transmits the e-mail to the mail
20 server via the LAN control section 7.

On the other hand, a mail receiving section 105
receives the e-mail from the mail server at a receiving
time. A binary converting section 106 binary converts
the data section of the received e-mail from the text code
25 to the TIFF file. Thereafter, a TIFF expanding section
107 expands the TIFF file. Next, the compression and
decompression 101 decompresses compressed data so as to
be sent to a print section 8. The print section 8

prints out an image.

Thus, according to the other embodiment, it is possible to select either the image transmission using the WWW server or the image transmission by use of the e-mail in accordance with the recipient's terminal.

Further, in the aforementioned embodiment, the facsimile apparatus was explained as a communication terminal. However, the scope of the present invention includes the other image communication apparatus. For example, the present invention includes a PC to which a LAN card or a modem is connected in order to make connection with the Internet. The scanner or the printer can be connected to the PC through an external section I/F. The present invention also includes a network scanner having a network communication interface, and a network copy machine. Moreover, the present invention includes an image combination machine comprising a scanner, a printer, a copy machine, a facsimile apparatus, etc.

Furthermore, the present invention includes a computer-readable storage medium having a program code causing a computer to execute the same processing as that of the facsimile apparatus according to the aforementioned embodiment.

The present invention is not limited to the above described embodiments, and various variations and

modifications may be possible without departing from the scope of the present invention.

This application is based on the Japanese Patent Application No. HEI11-35889 filed on February 15, 1999,
5 entire content of which is expressly incorporated by reference herein.

What is claimed is:

1. An image transmitting apparatus comprising:
filing means for filing image data by unit of page;
5 registering means for registering a filed image file
to a server apparatus: and
informing means for transmitting an e-mail
including a server address of said server apparatus to
a recipient to which said image data should be
10 transmitted.
2. The apparatus according to claim 1, wherein said
registering means generates image data to be transmitted
in a plurality of data formats having a standard data
format and a non-standard data format, and registers image
15 data to said server apparatus.
3. The apparatus according to claim 1, further
comprising:
storing means storing a table in which a recipient's
e-mail address, serving as a recipient, and a server
20 address, serving as a registration destination for an
image file, are made to correspond to each other; and
server selecting means for selecting the server
apparatus corresponding to said e-mail address when the
recipient e-mail address is input using said table.
- 25 4. The apparatus according to claim 3, wherein a
single button dialing key number allocated to the e-mail
address is registered to correspond to the e-mail address
and said server selecting means selects a corresponding

server apparatus when the single button dialing key number is input.

5. The apparatus according to claim 1, wherein a menu screen in which a file name of the image file to be registered to said server apparatus is registered is generated in a form of a structured document, and said generated menu screen is registered to said server apparatus.

6. The apparatus according to claim 1, wherein when the image files for all pages are prepared, said registering means registers said image files to said server apparatus at one time.

7. The apparatus according to claim 1, wherein said registering means sequentially registers said image files every time when the image file for one page is generated.

8. A server apparatus registers image files from an image transmitting apparatus described in claim 1 and selects a requested image file when an image receiving apparatus where an image is sent accesses thereto, and transfers the selected image file thereto.

9. The apparatus according to claim 8, wherein when said image receiving apparatus where an image is sent accesses to thereto, a menu screen is first transmitted to said image receiving apparatus.

10. An image receiving apparatus comprising:
address extracting means for extracting a server address by use of an e-mail received from an image

transmitting apparatus; and

image obtaining means for obtaining an image file by unit of page by accessing to a server apparatus using said extracted server address.

5 11. The apparatus according to claim 10, wherein when image files are registered to the server apparatus in a plurality of data formats, said image obtaining means selects an image file of a data format suitable for an own processing capability and obtains the selected image
10 file.

 12. The apparatus according to claim 10, wherein when said image obtaining means first accesses to the server apparatus, said image obtaining means reads a menu screen and displays said menu screen, and receives an
15 selection for an image file on said menu image, and obtains the selected image file from the server apparatus.

 13. The apparatus according to claim 10, wherein when said image obtaining means fetches page numbers for all pages from the server apparatus and writes the page
20 numbers to a print instruction buffer, and fetches the image files having page numbers written to the print instruction buffer one page by one, and when a printing for one page is ended, said image obtaining means fetches a next page again.

25 14. The apparatus according to claim 10, wherein when said image obtaining means writes a page number instructed to be selected to a print instruction buffer, and fetches image files written to the print instruction

buffer one page by one, and when a printing for one page is ended, said image obtaining means fetches a next page again.

15 15. The apparatus according to claim 10, further comprising a remote controller with a display separated from the main body of said apparatus, wherein image data included in the image file received by the main body of said apparatus is transferred to said remote controller with a display so as to be displayed thereon.

10 16. The apparatus according to claim 10, further comprising a remote controller with a display separated from the main body of said apparatus, wherein said remote controller with a display instructs the main body of said apparatus to write a page number to a print instruction
15 buffer.

17. An image transmitting method comprising the steps of:

 filing image data by unit of page:

 generating a menu screen in which a file name of
20 image data is registered in a form of a structured document;

 registering said filed image data and said menu screen to a server apparatus; and

 transmitting an e-mail including a server address
25 of said server apparatus to a recipient to which said image data should be transmitted.

18. An image receiving method comprising the steps of:

receiving an e-mail including a server address to which image data to itself is registered;

extracting the server address from the received e-mail;

5 accessing to a server apparatus using the extracted server address so as to obtain a menu screen; and

obtaining image data by unit of page using said menu screen.

ABSTRACT OF THE DISCLOSURE

IFAX reads an original using a scanner in accordance with a transmitting instruction by an operator. Next, IFAX generates a menu screen in an HTML, image data filed
5 by unit of page is registered to a WWW server together with a generated HTML document. IFAX decides the WWW server based on a recipient's mail address. Next, IFAX sends notification of URL of a WWW server to a recipient to which image data should be transmitted. The recipient
10 accesses to the WWW server based on URL, fetches image data by unit of page, and instructs printing selectively.

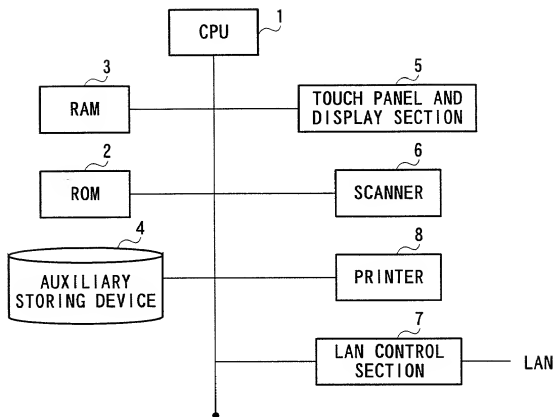


FIG. 1

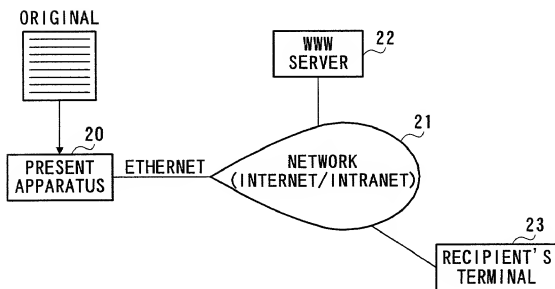


FIG. 2

<E-MAIL ADDRESS/URL CORRESPONDING TABLE>

E-MAIL ADDRESS	URL OF WWW SERVER
member*@ mgcs.co.jp	http://www.mem.mgcs.co.jp/
*. mgcs.mei.co.jp	http://www.inner.mgcs.co.jp/
*.mei.co.jp	http://www.inner.mei.co.jp/
*	http://www.pub.mgcs.co.jp/

FIG. 3

<PAIR OF E-MAIL ADDRESS REGISTERED
IN SINGLE BUTTON DIALING AND URL>

SINGLE BUTTON DIALING	E-MAIL ADDRESS	URL OF WWW SERVER
F1	a10@aaa.com	
F2	b20@bbb.com	http://www.user.mgcs.co.jp/
}	}	}
F99	x90@xxx.com	http://www.mem.mgcs.co.jp/

FIG. 4

<TRANSMITTING DATA ATTRIBUTE TABLE>

CASE OF TRANSMITTING ONLY STANDARD DATA

FILE ATTRIBUTE	MULTI-PAGE SIGN
.jpg	0

FIG. 5A

CASE OF TRANSMITTING NON-STANDARD DATA

FILE ATTRIBUTE	MULTI-PAGE SIGN
.jpg	0
.tif	1
.bmp	0

FIG. 5B

<RECEPTION CAPABILITY TABLE>

FILE ATTRIBUTE	MULTI-PAGE SIGN (1 IS MULTI-PAGE FILE)	
.bmp	0	↑ HIGH PRIORITY ↓ LOW PRIORITY
.tif	1	
.jpg	0	

FIG. 6

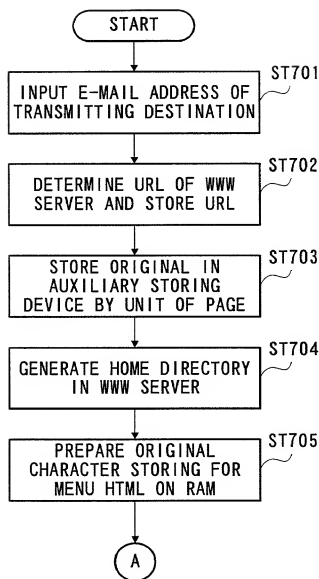


FIG. 7

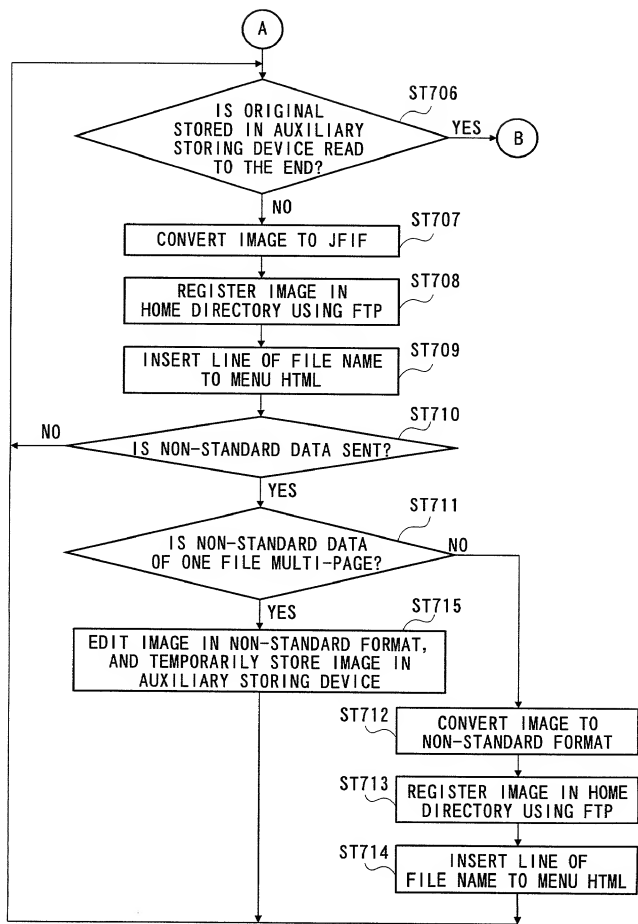


FIG. 8

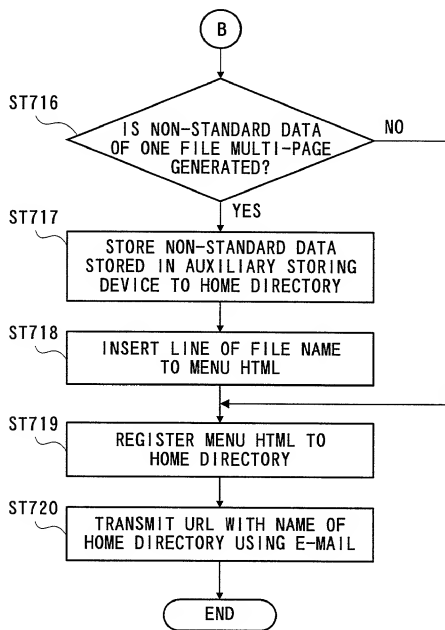


FIG. 9

```
<HTML>
<HEAD>
<TITLE>faxmenu</TITLE>
</HEAD>
<BODY>
</BODY>
</HTML>
```

FIG. 10

```
<HTML>
<HEAD>
<TITLE>faxmenu</TITLE>
</HEAD>
<BODY>
<A HREF="fax01.jpg">fax01.jpg</A><BR>
<A HREF="fax02.jpg">fax02.jpg</A><BR>
<A HREF="fax03.jpg">fax03.jpg</A><BR>
<A HREF="faxtiff.tif">faxtiff.tif</A><BR>
<A HREF="faxb01.bmp">faxb01.bmp</A><BR>
<A HREF="faxb02.bmp">faxb02.bmp</A><BR>
<A HREF="faxb03.bmp">faxb03.bmp</A><BR>
</BODY>
</HTML>
```

FIG. 11

MAIL HEADER

Content-type:message/external-body:
access-type=URL:
URL="http://www.pub.mgcs.co.jp/f981118160130/
expiration="Fri, 29 Dec 1998 17:00:00 +0900(JST)
Content-type: text/html
Content-ID: <id42@fax.mgcs.co.jp>
Content-Transfer-Encoding: binary

MAIL MAIN BODY

FIG. 12

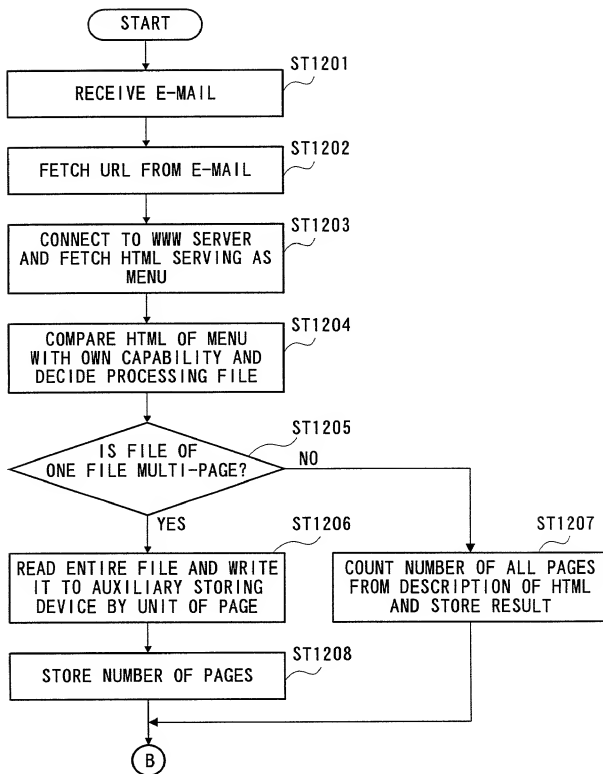


FIG. 13

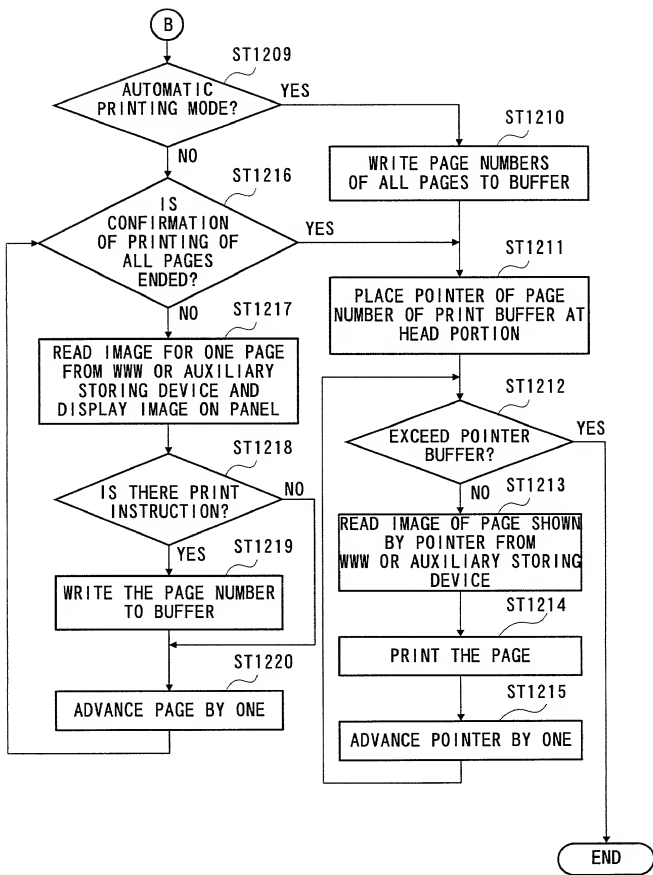


FIG. 14

PRINT INSTRUCTION BUFFER

1, 3, 5, 6...

↑
POINTER

FIG. 15




FIG. 16

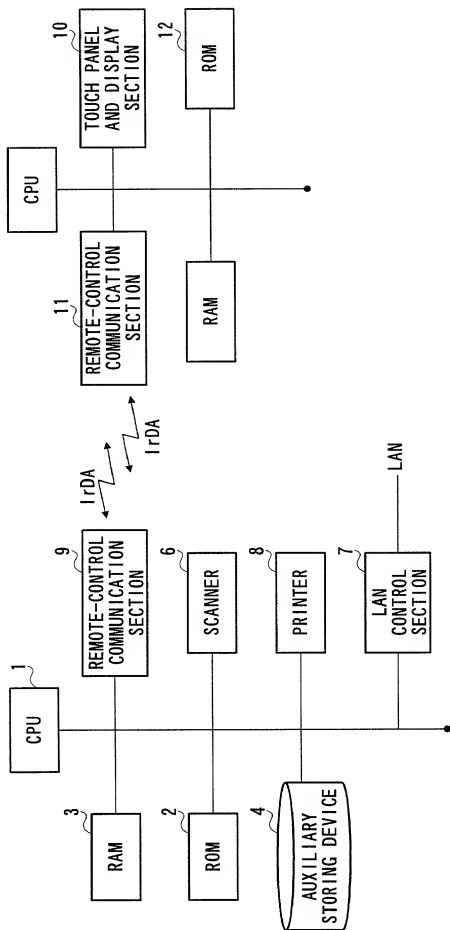


FIG. 17

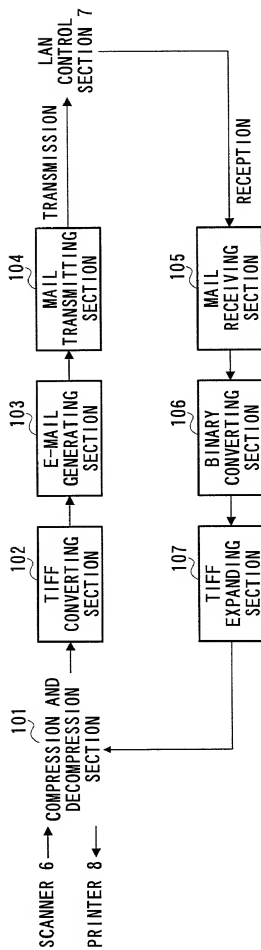


FIG. 18

Declaration and Power of Attorney For Utility or Design Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する:

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が下欄に記載されている場合)と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE TRANSMITTING APPARATUS
AND IMAGE RECEIVING APPARATUS

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as

Application No. _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a-d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior foreign applications
先の外国出願

IP11-35889	JAPAN	15/February/1999
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)
(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願の年月日)

Priority claimed
優先権の主張

<input checked="" type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし
<input type="checkbox"/> Yes あり	<input type="checkbox"/> No なし

Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第119条(a)項に基づき、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づき下記の合衆国特許出願、又は第365条(c)項に基づき合衆国を指名したPCT国際出願の利益を主張し、本出願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の条件下、先の合衆国特許出願又はPCT国際出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中、放棄済み)

(Status)
(Patented, pending, abandoned)

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中、放棄済み)

(Status)
(Patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以下の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士あるいは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum
Bruce H. Bernstein
Roger P. Glass
James L. Rowland
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Reg. No. 28,394
Reg. No. 29,027
Reg. No. 30,841
Reg. No. 32,674
Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**
1941 ROLAND CLARKE PLACE
RESTON, VA 20191

接電話連絡先: (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.
(703)716-1191

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor
同発明者の署名	Toshihisa SAWADA
日付	Inventor's signature Date
住所	Residence 23 Apr. 1999
国籍	2-14-5, Ikenoue, Shirol-machi, Inba-gun, Chiba 270-1425 Japan
郵便の宛先	Citizenship Japan
	Post Office Address 2-14-5, Ikenoue, Shirol-machi, Inba-gun, Chiba 270-1425 Japan
第2の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any
同第2共同発明者の署名	Second Inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
郵便の宛先	Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)